

Pitch: .100" x .100"

# INSULATION DISPLACEMENT SOCKET, VALUE LINE

## SPECIFICATIONS

### ENVIRONMENTAL

Temperature Range: -55°C to +105°C

### MECHANICAL

Insulator Material: Glass-filled thermoplastic, black, UL94V-0

Contact Material: Copper Alloy

Contact Plating: Gold Flash

Terminates To: .050" cable, 28 AWG

### ELECTRICAL





Current Rating: 1 AMP

Consult factory for additional options

CA- POSITION FID-A- POLARIZATION -SR

POSITION	POLARIZATION
06 20 40	Blank = no polarization
08 24 44	SPT = w/polarization
10 26 50	
12 30 60	
14 34 64	
16 36	

DIMENSIONS		
Position	A	B
06	.480 [12.19]	.200 [5.08]
08	.580 [14.73]	.300 [7.62]
10	.680 [17.27]	.400 [10.16]
12	.780 [19.81]	.500 [12.70]
14	.880 [22.35]	.600 [15.24]
16	.980 [24.89]	.700 [17.78]
20	1.180 [29.97]	.900 [22.86]
24	1.380 [35.05]	1.100 [27.94]
26	1.480 [37.59]	1.200 [30.48]
30	1.680 [42.67]	1.400 [35.56]
34	1.880 [47.75]	1.600 [40.64]
36	1.980 [50.29]	1.700 [43.18]
40	2.180 [55.37]	1.900 [48.26]
44	2.380 [60.45]	2.100 [53.34]
50	2.680 [68.07]	2.400 [60.96]
60	3.180 [80.77]	2.900 [73.66]
64	3.380 [85.85]	3.100 [78.74]

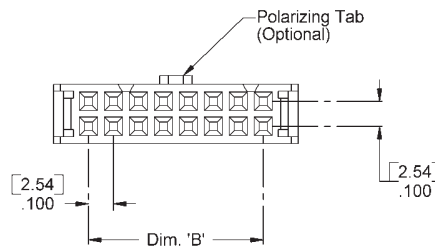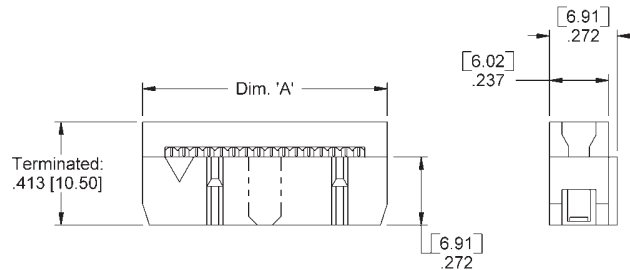

Mating Product: H Series, DXX, DXXR strip header  
Drawing Number CA-610206

