

Pitch: .100" x .100"

INSULATION DISPLACEMENT SOCKET

SPECIFICATIONS

ENVIRONMENTAL

Temperature Range: -40°C to +105°C

MECHANICAL

Insulator Material: Glass-filled thremoplastic, gray, UL94V-0

Contact Material: Copper Alloy

Contact Plating: See option below

Terminates To: .050" cable

ELECTRICAL


Current Rating: 1 AMP

Consult factory for additional options

CA- IDS3- - -SR

POSITION	PLATING	POLARIZATION
06 14 26 40 62	C = 15μ IN gold	Blank = no polarization
08 16 30 44 64	F = 30μ IN gold	SPT = w/polarization
10 20 34 50		
12 24 36 60		

DIMENSIONS		
Position	A	B
06	.480 [12.19]	.200 [5.08]
08	.580 [14.73]	.300 [7.62]
10	.680 [17.27]	.400 [10.16]
12	.780 [19.81]	.500 [12.70]
14	.880 [22.35]	.600 [15.24]
16	.980 [24.89]	.700 [17.78]
20	1.180 [29.97]	.900 [22.86]
24	1.380 [35.05]	1.100 [27.94]
26	1.480 [37.59]	1.200 [30.48]
30	1.680 [42.67]	1.400 [35.56]
34	1.880 [47.75]	1.600 [40.64]
36	1.980 [50.29]	1.700 [43.18]
40	2.180 [55.37]	1.900 [48.26]
44	2.380 [60.45]	2.100 [53.34]
50	2.680 [68.07]	2.400 [60.96]
60	3.180 [80.77]	2.900 [73.66]
62	3.280 [83.31]	3.000 [76.20]
64	3.380 [85.85]	3.100 [78.74]

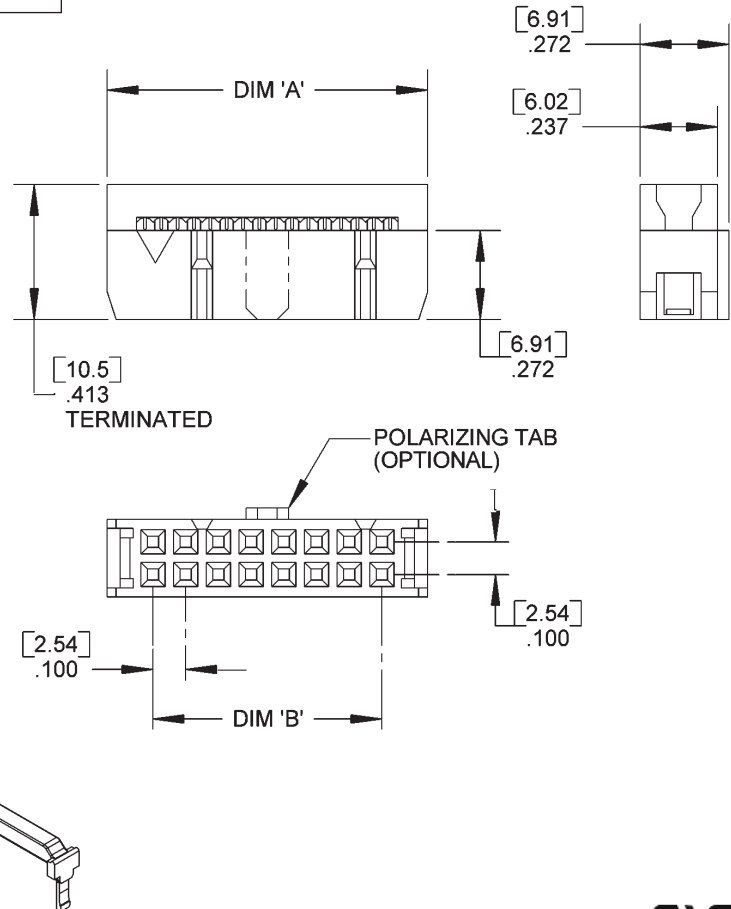

Mating Product:
Drawing Number CA-610285



For more information please contact our customer service department or visit our website at circuitassembly.com